

Drive. Technical data.

	Medium Range (MR)	Long Range (LR)
Drive train	BPW eTransport	
Max. Power (kW/PS)	100/136	
Max. Torque at wheel (Nm)	6,580	
Max. Climbing ability (%)	> 20 %	
Battery capacity nominal (kWh)	84	126
Range (km)	130*	200*
Max. AC/DC charging (kW)	22/100	
Min. AC/DC charging time from 20 - 80% (min)	200/45	320/72


*Depending on intended use and driving style.

Weights. Payload.

	Medium Range (MR)			Long Range (LR)	
	Standard	Long	Box body	Long	Box body
Permissible total weight (kg)	7,490				
Towing capacity braked/unbraked (kg)	3,500/ 750				
Permissible axle load front/rear (kg)	3,100/5,600				
Unladen weight (kg)	3,205	3,240	4,140**	3,670	4,570**
Max. payload (kg)	4,285	4,250	3,250	3,820	2,920

**Case with 15 pallet spaces, without tail lift.

Dimension. Chassis.

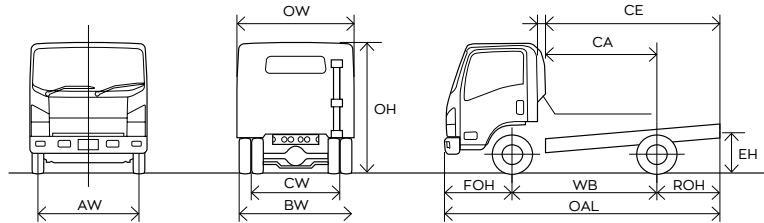

	OAL	WB	FOH	ROH	CE	CA	OW	AW	BW	CW	OH	EH
Standard	5,985	3,465	1,110	1,510	4,305	2,795	2,115	1,680	2,115	1,650	2,265	805
Long	7,815	4,475	1,110	2,230	6,135	3,905	2,115	1,680	2,115	1,650	2,265	780

Dimensions in mm (dimensions are subject to tolerances)

Features. Safety and assistance systems.

Emergency Brake Assist	●
Lane departure warning	●
Cruise control	●
Electronic Stability Programme	●
Traction control system	●
Anti-lock braking system	●
Cornering assistant	○

- = Standard features
- = Optionally available

The BAX fulfils high safety requirements according to the latest technical standards. This includes functional safety according to ISO 26262 and HV intrinsic safety according to DGUV.